

Specification

CATEGORY	MT122	MT125
ENGINE		
Type	3 - Cylinder, Indirect Injection, Water - cooled	
Model (Tier 4)	Yanmar 3TNV76F	Yanmar 3TNV80F
Engine HP (gross)	21.5	24.7
PTO HP	15.0	17.2
Rated speed (rpm)	3,000	
Displacement-cu (in³)	68.0	77.3
Fuel tank capacity (gal)	6.6	
Alternator (V-A)	12V - 40 Amps	
DRIVE TRAIN		
Transmission	Hydrostatic Drive	
No. of Speed	2 Ranges	
Brakes	Wet, Multi - disc	
Steering	Hydrostatic Power Steering	
PTO		
Type	Independent	
Rear (rpm)	Standard (540 rpm)	
MID (rpm)	Standard (2500 rpm)	
HYDRAULIC SYSTEM		
Implement pump (gpm)	4.6	
Steering pump (gpm)	2.1	
Total flow (gpm)	6.7	
Category (3pt hitch)	CAT I	
Hitch Lift capacity, lbs (Hitch end)	970 (@610mm:728)	
Lift control type	Position	
DIMENSION		
Overall length (Bumper to link in)	97	
Overall width with tires (in)	47	
Wheelbase (in)	56	
Ht to top of rops (in)	87	
TIRE SIZE		
Turf Front / Rear	18 x 8.5 - 10 / 26 x 12.0 - 12	
IND Front / Rear	18 x 8.5 - 10 / 26 x 12.0 - 12	
WEIGHT		
Total weight without ballast (lbs)	1,433	1,444

Note Specifications and design are subject to change without prior notice.

Get More Standard Feature

- Power steering
 - Switch operated Independent PTO, rear & mid
 - Lever selector for rear PTO, mid PTO or both
 - Foldable ROPS
 - Hydraulic position control
 - Differential lock
 - Front loader valve and joystick
 - Cup holder and 12V power outlet
 - Pre-heat starting aid
 - Safety flashers & turn signals
- Fuel, coolant temperature, tachometer & hour meter gauges
 - Pre-heating, parking brake, battery charging, engine oil pressure, PTO operation and high beam operation/warning lights



LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com

Front End Loader	LL1100
Tractor Application	MT1 Series
Maximum Lift height(@ Pivot pin)(in)	72.0
Clearance with Attachment Dump(in)	50.0
Reach at Maximum Height(in)	26.5
Maximum Dump Angle(deg)	45
Maximum Rollback Angle(deg)	28
Digging Depth(in)	4.7
Overall Height in Carry Position(in)	41.5
Lift Capacity(@ Pivot pin)(lbs)	886
Breakout Force(@ Pivot pin)(lbs)	1,960
Approx. Weight (Loader w/o Bucket)(lbs)	300

Backhoe	LB1107
Tractor Application	MT1 Series
Digging Depth (in)	77.8
Reach from centerline of swing Pivot (in)	144.9
Loading Height (in)	59.6
Swing Arc (deg)	140.0
Transport Height (in)	74.7
Bucket Rotating (deg)	169.4
Stabilizer Spread (Down position) (in)	78.6
Stabilizer Spread (Up position) (in)	53.2
Bucket Digging force (lbs)	2,097
Shipping weight (lbs)	873

Mid-mount Mower	LM1160
Tractor Application	MT1 Series
Cutting Width (in)	60.0
Overall Width (in)	75.6
Cutting Height Range (in)	1 ~ 4
Deck shell Thickness (in)	0.126
Spindle Speed at 3000 RPM	2,786
Blade Tip Speed (ft./min)	14.932
Number of Blades	3
Blade Length (in)	20.5
Blade Width (in)	2.48
Blade Thickness (in)	0.236
Shipping Weight of Base 60" Deck (lbs)	284.4



MT1 Series

MT122 / MT125
Sub-compact



Excel in Your Field™


- Eco-friendly Tier 4, 21.5/24.7 HP, 3 cylinder fuel efficient engine
- 6 year warranty*
- 2 range HST with dual pedals and cruise control
- Front wheel mechanical assist 4WD
- Choice of industrial or turf tires at no additional cost
- Available quick attach front end loader and grille guard
- Available sub-frame mounted, quick attach backhoe
- Available 60” mid-mount mower

MT1 Series Sub-compact

Excel in Your Field™



Easily adjust mowing height
Adjusting the cutting height for the available 60" mid-mount mower is as easy as turning a dial.

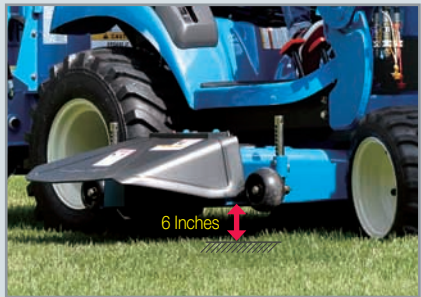

Excellent mower ground clearance
The available mid-mount mower is easy to remove or attach and provide a full 6 inches of ground clearance



Powerful 6' backhoe
The available sub-frame mounted backhoe can be quickly and easily attached or removed, unlike some competitive models without backhoe availability



HST dual pedal
Maximizes ease of use with effortless speed and directional changes



970 lb lift capacity
The high lift capacity 3 point hitch is smooth and responsive



Your choice of tires
Your choice of turf or industrial tires at no additional cost



Reliable power and performance
Eco-friendly, fuel efficient Yanmar engine delivers quiet reliable power and performance.



Spacious Flat Deck
The full flat deck offers plenty of leg room and makes getting on and off the tractor a lot easier



Comfortable High-Back Seat
Supportive and comfortable seat reduces fatigue and reverses position for backhoe use